

SuperTeks® Series 500



For fixing to thick steels (hot rolled steel) from **4mm to 12.5mm**



Hexagon Head SuperTEKS® – Climaseal® 3 with & without EPDM



Buildex® Warranty



Climaseal® 3

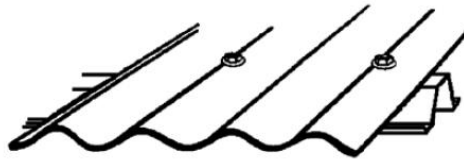

Cut Washer

Gauge	T.P.I x Length	Washer Type	Pack / Carton Qty	Part Number	Product Description	Product Feature
<i>Thick Steel</i>						
5.5mm / 12g	24 x 32	Cut Washer	500 / 3	1A-C512-2432-HS	CTEK5 12-24x32 HWFS	
	24 x 38	Cut Washer	500 / 3	1A-C512-2438-HS	CTEK5 12-24x38 HWFS	
	24 x 50	Cut Washer	1000	1A-C512-2450-HS	CTEK5 12-24x50 HWFS	
	24 x 65	Cut Washer	1000	1A-C512-2465-HS	CTEK5 12-24x65 HWFS	



Climaseal® 3



Climaseal® 3 is a unique anti-corrosive coating system consisting of 3 distinct layers which combine to give exceptional corrosion protection:

1. A mechanically deposited zinc tin alloy coating giving excellent galvanic protection.
2. A passivation coating to passivate the zinc tin alloy, further inhibiting coating loss.
3. An aluminum filled polyester coating with good all-round corrosion and long-term weathering resistance.

Designed to conform to AS3566 Class 3, real life atmospheric testing has confirmed that the performance of Climaseal® 3 far exceeds the standard!

Benefits of Climaseal® 3

- Minimal risk of coating damage during installation thanks to new and tougher coating formula.
- Better driving performance because of a smoother, harder finish.
- Superior performance in extreme temperatures, developed and tested in Australia for Australasian conditions.
- Effective sealing of roofing sheets and cladding. The black seal remains elastic in extreme temperatures and will not breakdown or allow water entry.

Climaseal® 3 should be used for general external use in mild and moderate industrial, and mild marine applications.



Climaseal® 3 screws are easily recognisable by their silver grey appearance, and the silver stripe found on the label packaging of Buildex® bulk boxes.



For your sign of quality, look for the "BX" mark on the screw head.



Pudong Airport



Buildex® Warranty Periods – Climaseal® 3

	Very Severe Marine	<i>Not Recommended</i>
	Severe Marine	<i>Not Recommended</i>
	Mild and Moderate Marine	7 Years
	Very Severe Industrial	<i>Not Recommended</i>
	Severe Industrial	<i>Not Recommended</i>
	Industrial	20 Years
	Light Industrial / Urban	30 Years
	Mild Urban / Rural	40 Years

For Full Warranty details see inside back cover