

DD565 Electro Pneumatic Combi Hammer



Noise / Vibration Information

Sound Pressure Level: 98dB (A)
 Sound Power Level: 109dB (A)
 Wear Eye and Ear Protection

Vibration: The typical weighted acceleration does not exceed 8.8m/s²


Versatile and ergonomic

For volume drilling in concrete and light picking and chiselling.

Product Advantages

- Robust design and oil lubrication, guarantees the longest tool lifetime, even under the toughest working conditions
- Ergonomically designed and well balanced, little down-force pressure necessary
- High removal rates, excellent performance / weight ratio
- Depth gauge with quick adjustment by front handle
- Safety clutch system allows continuous drilling even when the drill bit jams in the toughest materials
- Improved impact mechanism excellent transfer of energy to the drill bit or chisel
- Horizontal and vertical drilling level gauge for accurate drilling
- Vibration reduction system for comfort while working
- Variable drilling and chisel speed switch
- Power LED indicator
- Service LED indicator shows 8 hours before tool requires service
- Rotary and Hammer / Hammer only selector built into casing

Applications

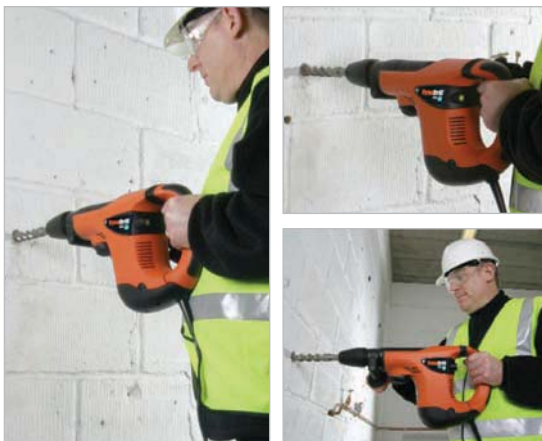

- Volume drilling in concrete
- Picking and chiselling
- Core drilling

Specification

Machine weight	5.9kg
Voltage	240V
Power input	1,110W
Power output	650W
Rotation speed - unload	0 - 600rpm
Rotation speed loaded	0 - 400rpm
Impact rate	0 - 3,000bpm
Impact force (Max)	10J
Tool holder	R3™ Max
Drilling diameters:	14 - 45mm
Optimum drilling diameter:	
Concrete	18 - 38mm
Core Cutting	40 - 125mm
Chisel positions	16
Lubrication	Oil
Cable length	4m

DD565 Electro Pneumatic Combi Hammer

Part No.	Description	Carry Case
7E-DD56-5VVV	DD565 5kg Rotary Hammer	1

Kit includes: DD565 in shock proof case, lubricating oil and instruction manual